

System-Lighting

SL-SERIES




RAL 9006 /silver


TECHNICAL DATA

V	220-240
Hz	50-60
W	13,5 / 20 / 26,5 / 33
Lm	2640 / 3960 / 5280 / 6600
K	5000
Lux	1177 / 1604 / 1915 / 2119 (100cm)
CRI	> 80 (typ. 83)
RG	0
IP	20

Material:	Naturally anodized aluminum
Energy efficiency:	Constant current concept (up to 200 lm/W)
Dimming:	Optional (nonDim/DIM 1-100%)
Service life:	102,000 hours
Warranty:	2 years
LED cover:	Microprismatic lens/plus additional high-tech diffuser film
Power connection:	WIELAND plug-in system GST18i3 IN/OUT (cascadable)
LED driver:	Tridonic
Color:	Silver
Dimensions:	79 x 60 mm (HxW in mm)

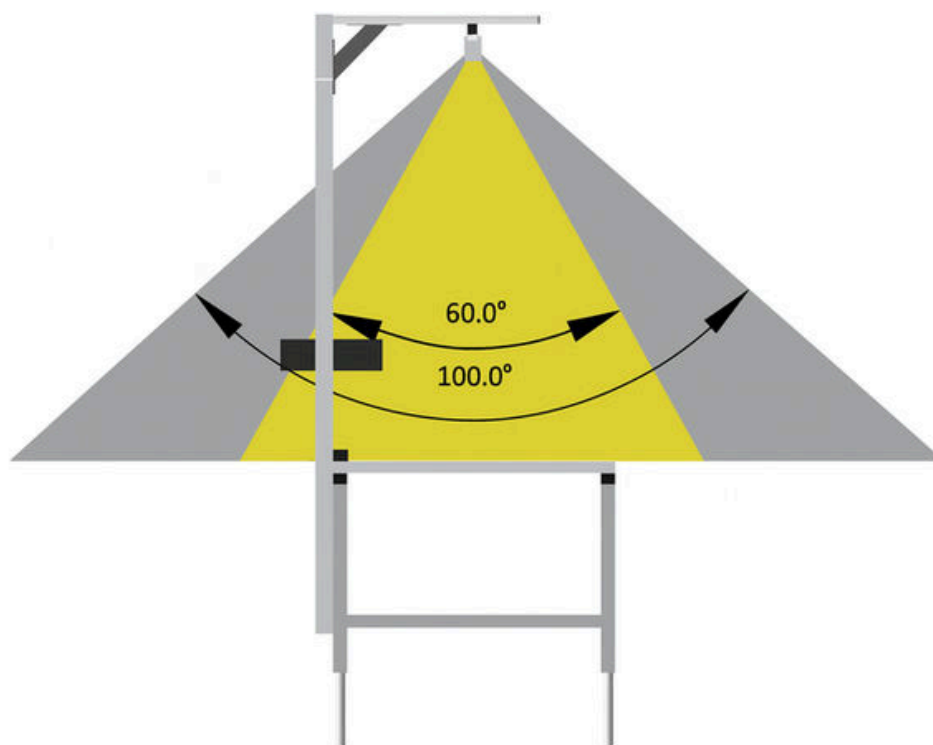

8 mm mounting groove



incl. Angle



ITEM NUMBERS



5000 Kelvin / non-dimmable

Length	Power	Lumen	Lux (100cm)	Item no.:
585mm	13,5 W	2640	1177	SL28.850S
870mm	20 W	3960	1604	SL38.850S
1150mm	26,5 W	5280	1915	SL48.850S
1435mm	33 W	2119	2119	SL58.850S



5000 Kelvin / dimmable 1-100%

Length	Power	Lumen	Lux (100cm)	Item no.:
585mm	13,5 W	2640	1177	SL28.850sd+
870mm	20 W	3960	1604	SL38.850sd+
1150mm	26,5 W	5280	1915	SL48.850sd+
1435mm	33 W	2119	2119	SL58.850sd+

FASTENERS



swivel mounting kit
(included)

SKU: 024.95



Mounting kit for side
mounting on crossbars

SKU: 042.08



Mounting bracket for
attaching side lights

SKU: 044.95

CONNECTION



3 m power cord with Wieland socket
and Schuko plug

SKU: 602.30



5 m power cable with Wieland socket
and Schuko plug

SKU: 602.21

ACCESSORIES



1 m connecting cable

SKU: 602.11



2 m connecting cable

SKU: 602.21



external dimming switch

SKU: SDE+03

HIGHLIGHTS

- ✓ Bright and durable thanks to state-of-the-art LED technology with up to 102,000 operating hours (L80/B10).
- ✓ Optimized 60° beam angle for uniform, pinpoint illumination without multiple shadows.
- ✓ With Wieland GST18i3 IN/OUT for continuous cascading of multiple lights – perfect for long workstations.
- ✓ Brightness can be conveniently adjusted – the light remembers the last light level setting when it is switched back on.
- ✓ Housing made of durable aluminum with high-quality, low-loss LED converter – durable, reliable, low maintenance.



Zum Weiherlein 16
97509 Kolitzheim
Germany

SIS Licht GmbH & Co. KG
Rudolf-Diesel-Straße 4
97424 Schweinfurt
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

